


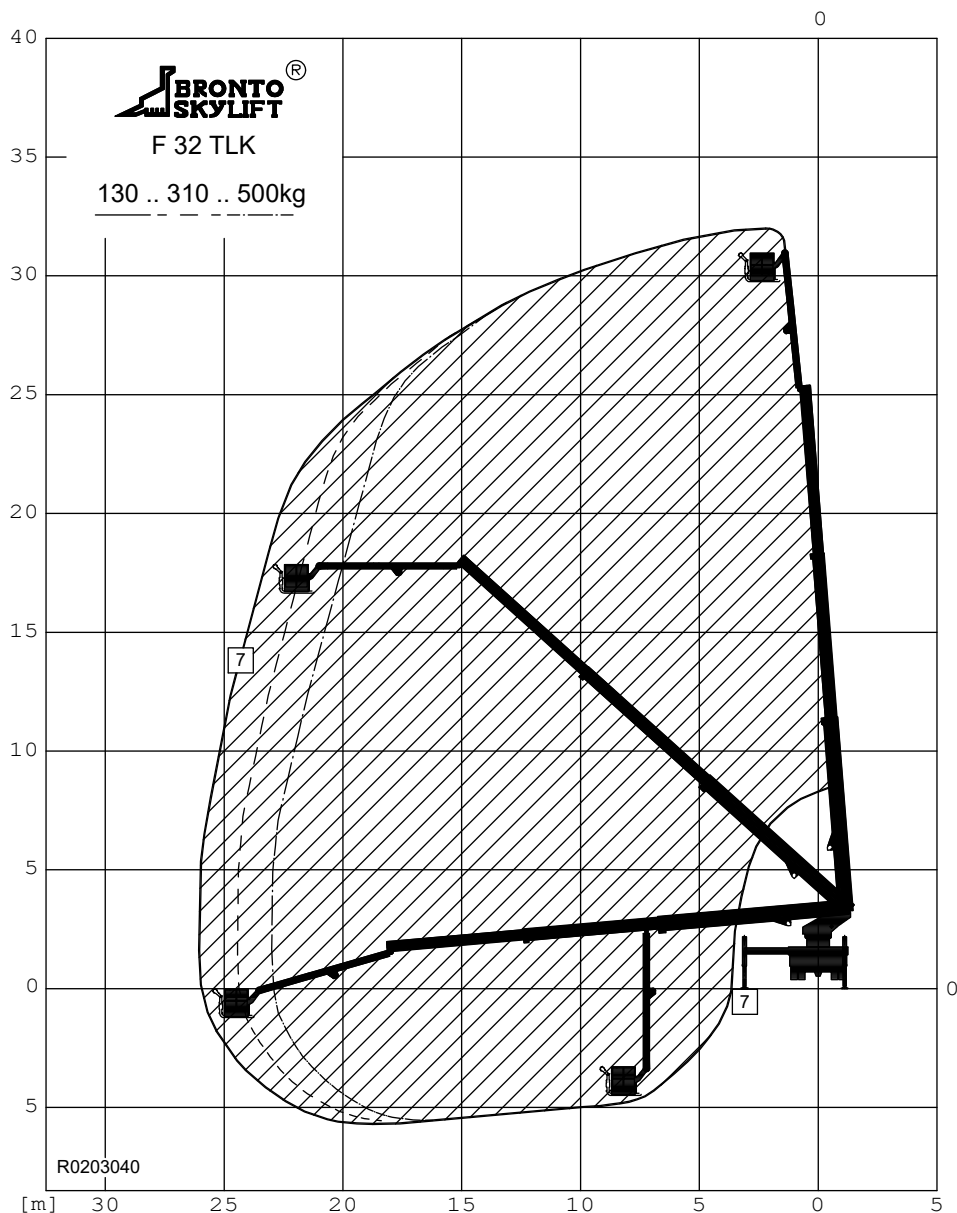

TECHNICAL DATA

Safe working load max.	: 500 kg
Al water pipe, rescue ladder	
Max. permitted wind speed	: 12.5 m/s
Typical GVW	: 19 ton
min. operating weight	: 17.8 ton
Outrigger width and length c/c	
- stepless width	: 2.28 - 6.2 m
- length	: 4.7 m

PRELIMINARY

All rights reserved
This specification may be revised without notice.
This document, which is our exclusive intellectual property, shall be treated as strictly private and confidential and shall neither be copied nor communicated to any third person without our written consent.
BRONTO SKYLIFT OY AB
Tampere Finland

ULOTTUVUUSKAAVIO
RÄCKVIDDSDIAGRAM
OUTREACH DIAGRAM
ARBEITSDIAGRAM
DIAGRAMA DE TRABAJO

SYSTEM Vertex G4	Mass (kg) Designer	Cal KKe	Mea 2020-06-15	General Tolerances Machining : SFS4011 Keski Punching : SFS4012 Welded Construction: BBS 2.51
Scale 1 : 225	Ark Size A3	Status PRELIMINARY		

Description

Ulottumakaavio F 32 TLK
500..310..130 kg, MOW 17.8 ton



Drawing Nro.

R0203040

Rev.

Rev.	Change Nro.	Change Description	Date	Ch. By